


# Euro Twin Sign Lite

Cat. No. ETSGNL  
Cat. No. ETSGNL/R



The Euro Twin Sign Lite is an extra compact luminaire designed for situations where the fixture needs to be very unobtrusive or concealed. This luminaire has been developed for lighting signs, wall displays, building highlights and external barbeques.

This luminaire has a fully adjustable head allowing 360 degree rotation and 90 degree elevation. Hunza Euro fixtures use miniature MR11 lamps to achieve a contemporary, discreet appearance but are still able to provide excellent illumination.

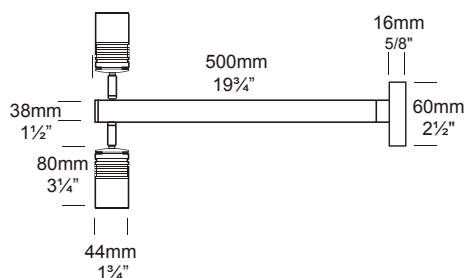

## Ordering Information

### Luminaire Type

ETSGNL - Euro Twin Sign Lite

### Material/Finish

COP - Copper  
SS - Stainless Steel

### Accessories

CJK150 - Cable Joint Kit  
LENSEURF - Frosted Lens

Ordering Example: ETSGNL COP - Euro Twin Sign Lite in Copper  
LENSEURF - Frosted Lens  
(accessories ordered separately)

**HUNZA**™ PURE  
OUTDOOR  
LIGHTING

HUNZA FACTORY  
130 Felton Mathew Ave  
Glen Innes  
Auckland 1072  
New Zealand

Ph: 64-9-528 9471  
Fax: 64-9-528 9361  
hunza@hunza.co.nz  
www.hunzalighting.com

INTERNATIONAL CONTACTS:  
[http://www.hunzalighting.com/  
contact.php](http://www.hunzalighting.com/contact.php)  
Specification may change without notice.  
Manufactured in New Zealand.  
© 2016 Hunza Holdings Ltd.

## Luminaire Construction

**CNC machined from one of the following metals:**

### Copper

Body: 45.4mm (1¾") x 80mm (3") copper rod.

Pole: 38mm (1½") x 500mm (19¾") copper tube.

Base: 2mm (1/16") hand spun copper.

### 316 Stainless Steel

Body: 45.4mm (1¾") x 80mm (3") stainless steel rod.

Pole: 38mm (1½") x 500mm (19¾") stainless steel tube.

Base: 2mm (1/16") hand spun stainless steel.

## Mounting

The luminaire is mounted to the wall using two 316 stainless steel screws through the shallow base 16mm (5/8") in depth. A Wall Box Adaptor Plate (Cat. WBAP) is available as an accessory to fit 3.0 and 4.0 junction boxes for USA/Canada.

## Features

### Lens

6mm (1/4") clear flush fit shatter resistant glass with Hex Cell Louvre for glare control.

Lifetime Warranty.

### Gasket

Silicone, iron impregnated 220°C (428°F).

### Lamp Holder

MR11 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) Teflon cables.

## Accessories

**Cable Joint Kit** (Cat. CJK150). Not approved for USA/Canada.


**Frosted Lens** (Cat. LENSEURF).

## Swivel

**Copper luminaire** - 360° rotation and 0-90° elevation, solid brass with anti rush spring.

**Stainless steel luminaires** - 360° rotation and 0-90° elevation, full stainless steel construction.

## Standards

IP66, UL1838, 

## Luminaire Weight

**Copper** - 2.000kg (4lb 6oz)

**Stainless Steel** - 1.500kg (3lb 3oz)

## Power Supply

Hunza Inground or Wall Mount Transformer: not included.

### USA and Canada



Hunza Wall Mount Transformer: not included.

## Lamp Options

MR11 - 20 watt lamp max.

### USA and Canada

MR11 - 10 watt lamp max.

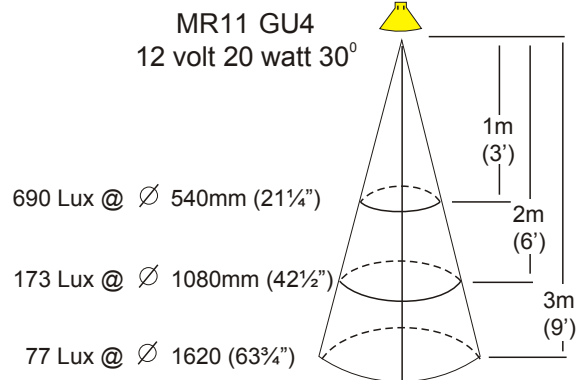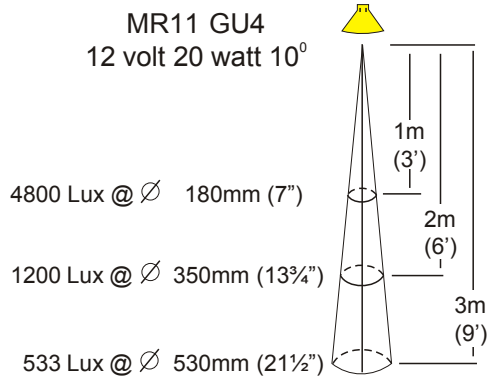

**HUNZA**™ PURE  
OUTDOOR  
LIGHTING

HUNZA FACTORY  
130 Felton Mathew Ave  
Glen Innes  
Auckland 1072  
New Zealand

Ph: 64-9-528 9471  
Fax: 64-9-528 9361  
hunza@hunza.co.nz  
www.hunzalighting.com

INTERNATIONAL CONTACTS:  
[http://www.hunzalighting.com/  
contact.php](http://www.hunzalighting.com/contact.php)  
Specification may change without notice.  
Manufactured in New Zealand.  
© 2016 Hunza Holdings Ltd.