

Light efficiency:

74 Lumen/Watt

Light quality:

CRI: 0

Color temperature:

0 K

Output: 354 lm

Peak: 367 cd

Power: 4.8 W

19.2V @ 0.250A

2 PLANES



Product name:

**DLCM-HP-GREEN-40D**

Date and time:

**12/10/2020 3:15:35 PM**

Item number:


**DLCM-HP-GREEN-40D**

Operator:

**HUNZA**

Additional information:

**DOWN LIGHT CEILING  
MOUNT HIGH POWER -  
250MA 19.2VOLT - IP66 -  
GREEN - 40DEGREE - SOLID  
POWDERCOATED  
ALUMINIUM**

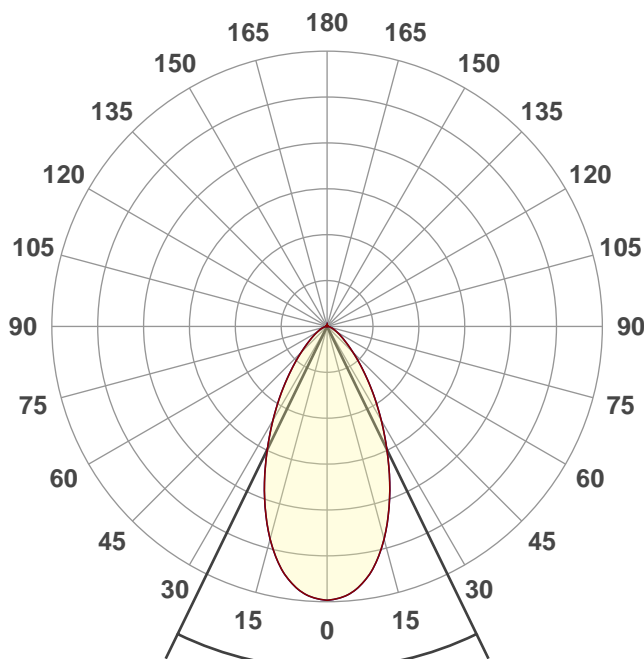

Beam angle

**51.8°**

Color





CIE1931

x: 0.182

y: 0.716

Spectra

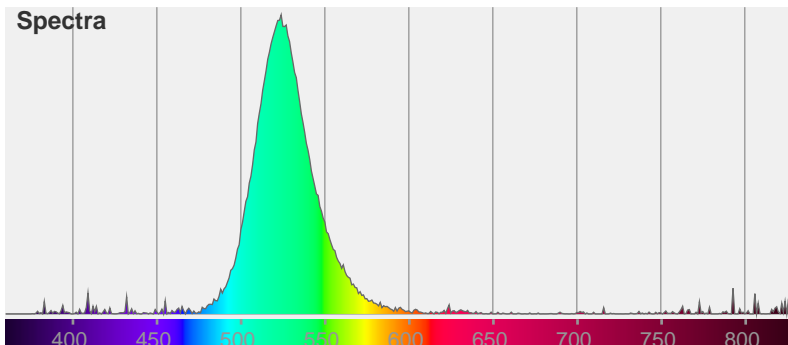

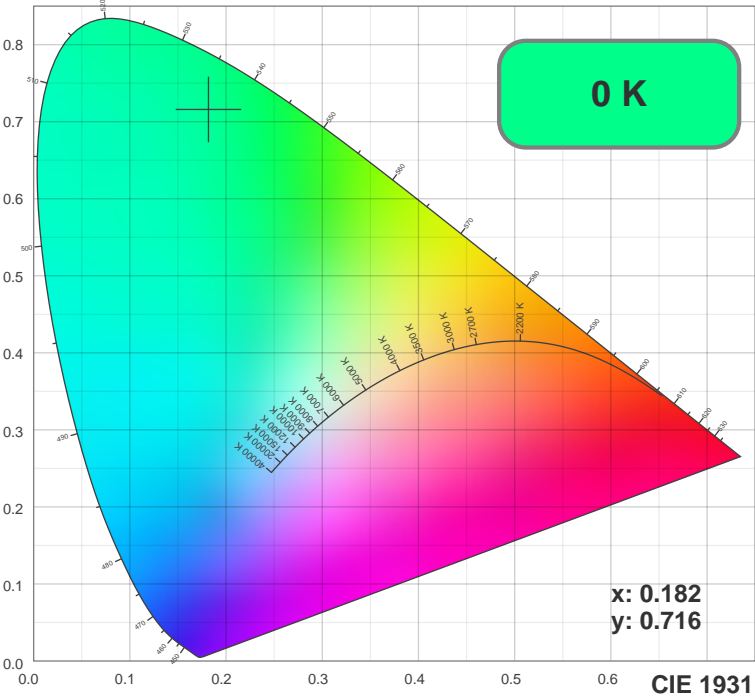

TM30: 0.0

0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16	

CRI R values, only R1-R8 are used to calculate final CRI value


R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

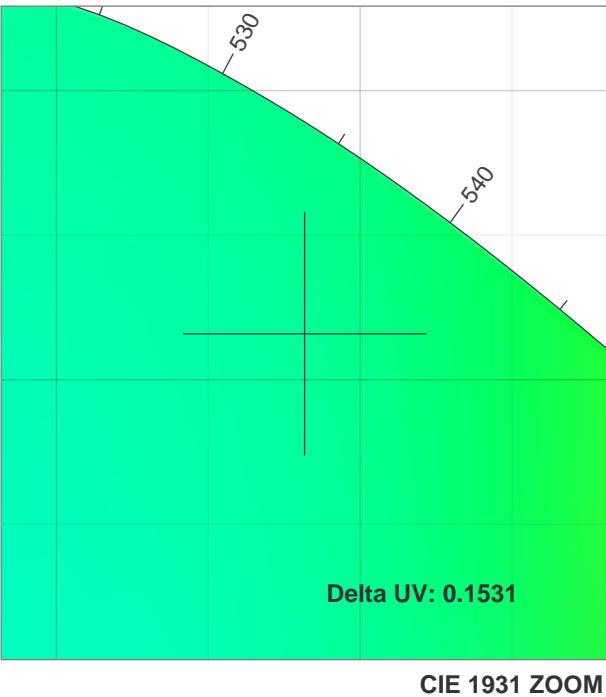

CRI: 0.0 (R1-R8)


0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15		

CQS: 0.0

0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15		

Color parameters

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Duv
0 K	0.0	0.0	0.0	0.0	0.0	0.2	0.7	0.1	0.4	NaN

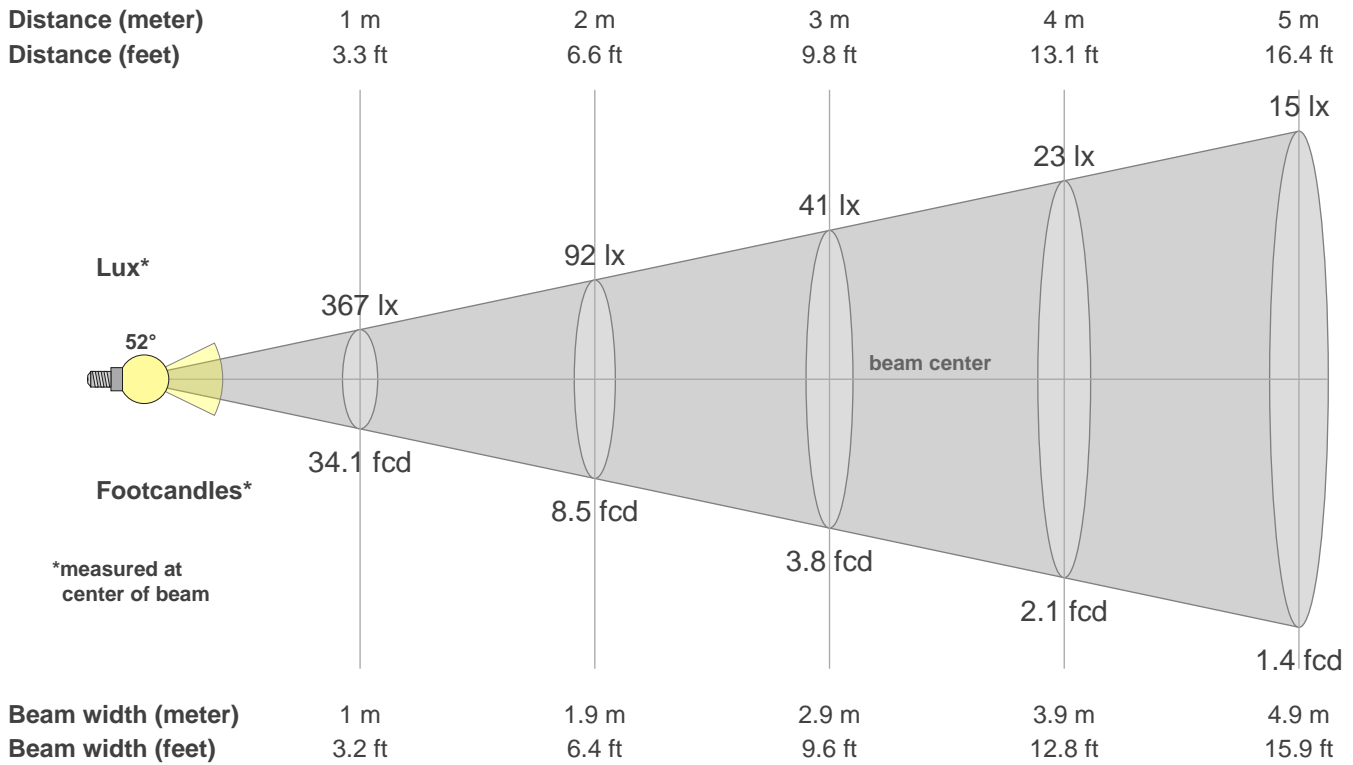

## Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
367	366	362	356	347	336	321	304	286	266	245	224	203	183	163	145	128	113	98	85
100%	100%	99%	97%	94%	91%	87%	83%	78%	72%	67%	61%	55%	50%	45%	40%	35%	31%	27%	23%

## Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
367	366	362	356	347	336	321	304	286	266	245	224	203	183	163	145	128	113	98	85
100%	100%	99%	97%	94%	91%	87%	83%	78%	72%	67%	61%	55%	50%	45%	40%	35%	31%	27%	23%

## Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
367	366	362	356	347	336	321	304	286	266	245	224	203	183	163	145	128	113	98	85
100%	100%	99%	97%	94%	91%	87%	83%	78%	72%	67%	61%	55%	50%	45%	40%	35%	31%	27%	23%

## Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
367	366	362	356	347	336	321	304	286	266	245	224	203	183	163	145	128	113	98	85
100%	100%	99%	97%	94%	91%	87%	83%	78%	72%	67%	61%	55%	50%	45%	40%	35%	31%	27%	23%

Beam angle 50%	Field angle 10%	Cutoff angle 2.5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
51.8°	97.2°	135.2°	92.8%	82.3%