

Light efficiency:

203 Lumen/Watt

Light quality:

CRI: 68.8

Color temperature:

5726 K


Output: 996 lm

Peak: 530 cd

Power: 4.9 W

19.6V @ 0.250A

2 PLANES

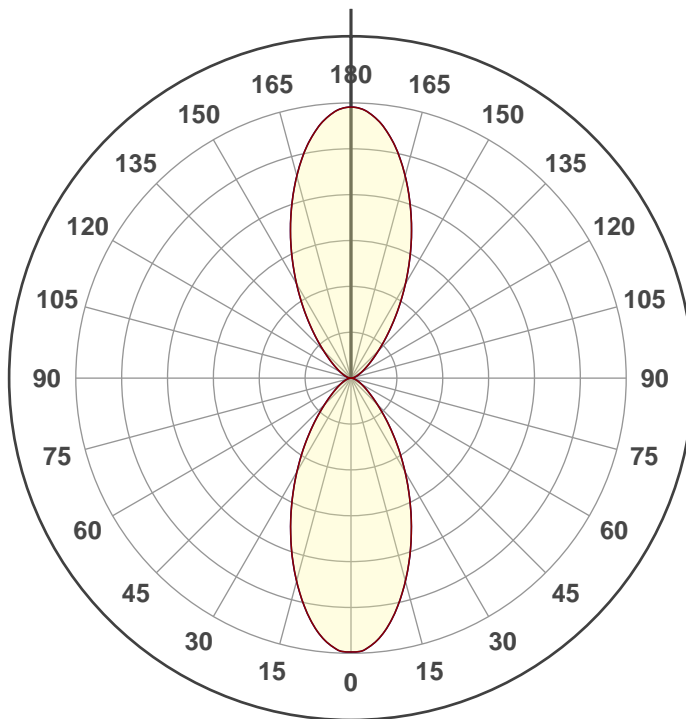

Beam angle


360°

Color



CIE1931
x: 0.327
y: 0.347

Spectra

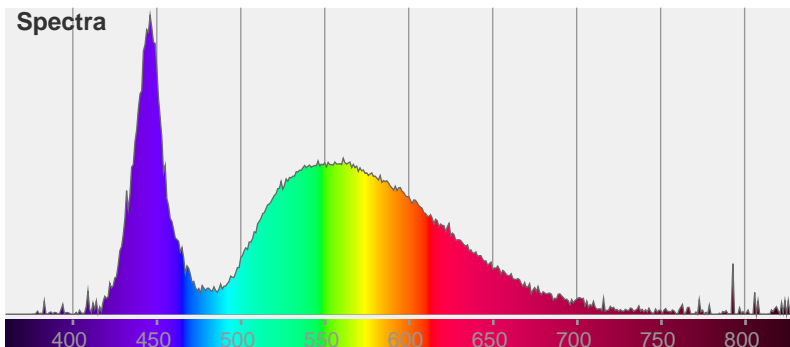

Product name:

PIL-HP-WHITE-30D

Date and time:

10/12/2020 2:35:17 PM

Item number:



PIL-HP-WHITE-30D

Operator:


HUNZA

Additional information:


**PILLAR LIGHT HIGH POWER -
250MA 19.6 x 2 VOLT - IP66 -
WHITE - 30 DEGREE - SOLID
POWDERCOATED
ALUMINIUM**

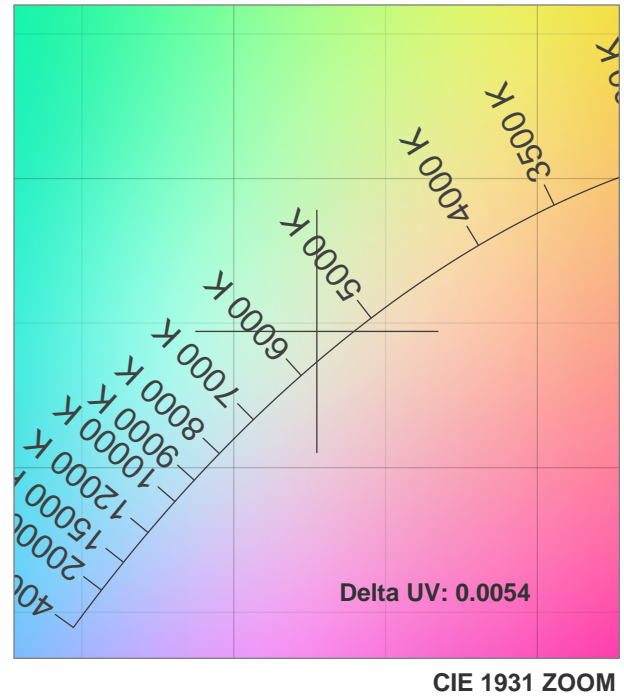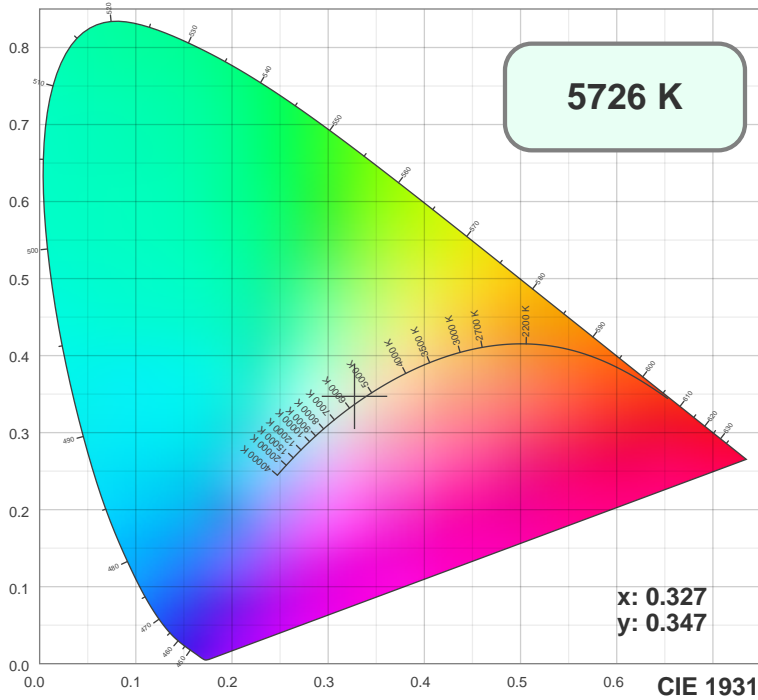

TM30: 70.3

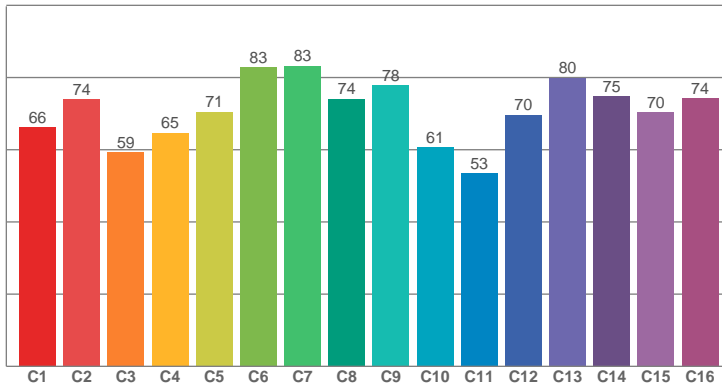

CRI: 68.8 (R1-R8)

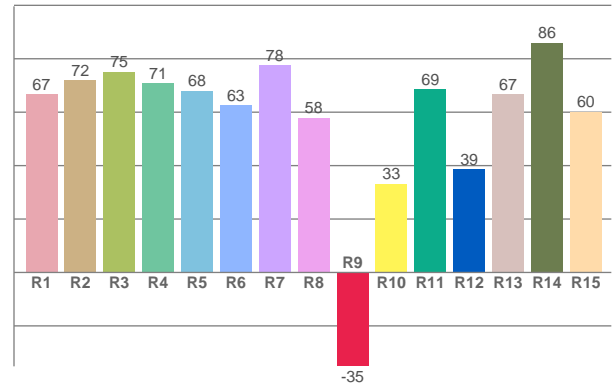

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
66.75	71.89	75.04	70.75	67.91	62.53	77.64	57.85	-35.14	33.18	68.57	38.58	66.62	85.89	60.11


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
66.18	73.89	59.33	64.72	70.51	82.81	83.19	74.11	77.88	60.71	53.39	69.61	79.89	74.77	70.42	74.28

CQS Q values


Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
77.61	91.49	60.27	56.78	67.52	69.78	73.49	84.46	88.37	69.50	64.75	66.82	69.66	55.88	64.77

CQS: 69.0

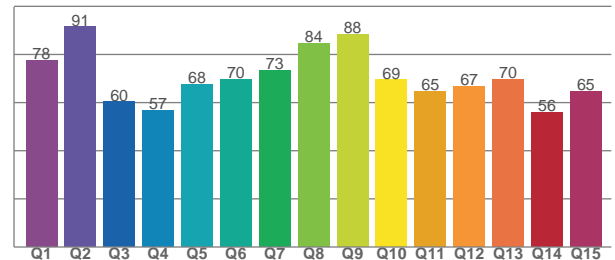

Color parameters

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Duv
5726 K	68.8	-35.1	70.3	94.7	69.0	0.3	0.3	0.2	0.3	0.0021

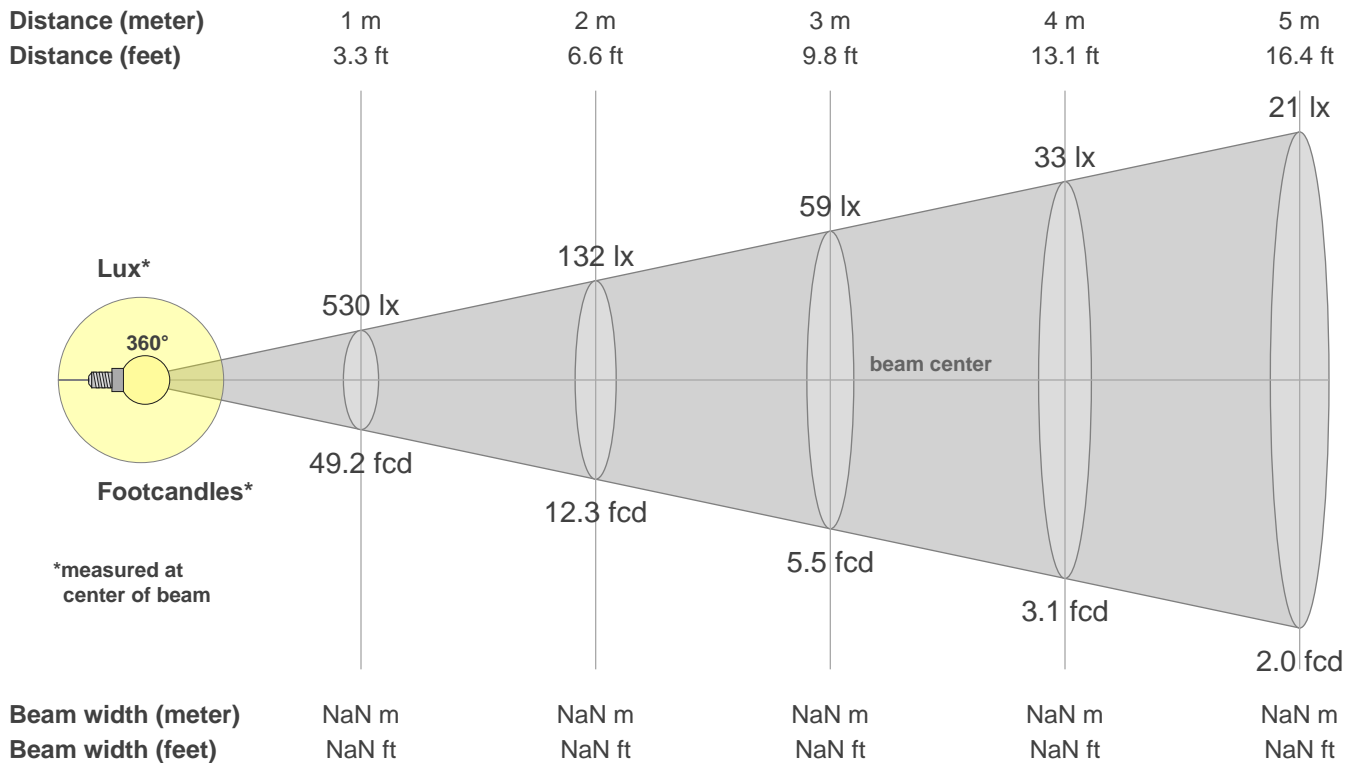

Intensities in 0° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
530	480	367	246	144	72	36	19	10	3	1	4	10	20	38	75	145	248	366	475
100%	91%	69%	46%	27%	14%	7%	4%	2%	1%	0%	1%	2%	4%	7%	14%	27%	47%	69%	90%

Intensities in 90° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
530	480	367	246	144	72	36	19	10	3	1	4	10	20	38	75	145	248	366	475
100%	91%	69%	46%	27%	14%	7%	4%	2%	1%	0%	1%	2%	4%	7%	14%	27%	47%	69%	90%

Intensities in 180° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
530	480	367	246	144	72	36	19	10	3	1	4	10	20	38	75	145	248	366	475
100%	91%	69%	46%	27%	14%	7%	4%	2%	1%	0%	1%	2%	4%	7%	14%	27%	47%	69%	90%

Intensities in 270° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
530	480	367	246	144	72	36	19	10	3	1	4	10	20	38	75	145	248	366	475
100%	91%	69%	46%	27%	14%	7%	4%	2%	1%	0%	1%	2%	4%	7%	14%	27%	47%	69%	90%

Beam angle 50%	Field angle 10%	Cutoff angle 2.5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
360.0°	360.0°	360.0°	47.1%	41.6%