


Euro Sign Lite

Cat. No. ESGNL

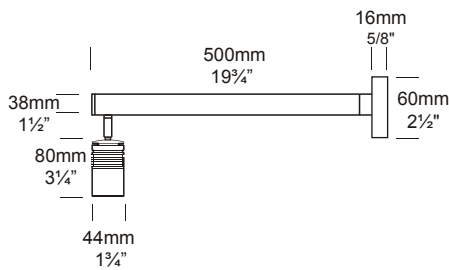

The Euro Sign Lite is an extra compact luminaire designed for situations where the fixture needs to be very unobtrusive or concealed. This luminaire has been developed for lighting signs, wall displays, building highlights and external barbeques.

This luminaire has a fully adjustable head allowing 360 degree rotation and 90 degree elevation. Hunza Euro fixtures use miniature MR11 lamps to achieve a contemporary, discreet appearance but are still able to provide excellent illumination.

Ordering Information

Luminaire Type

ESGNL - Euro Sign Lite

Material/Finish

COP - Copper
SS - Stainless Steel

Accessories

CJK150 - Cable Joint Kit
LENSEURF - Frosted Lens

Ordering Example: ESGNL SS - Euro Sign Lite in 316 Stainless Steel
LENSEURF - Frosted Lens
(accessories ordered separately)

Luminaire Construction

CNC machined from one of the following materials:

Copper

Body: 45.4mm (1³/₄" x 80mm (3") copper rod.

Pole: 38mm (1¹/₂" x 500mm (19³/₄" copper tube.

Base: 2mm (1/16") hand spun copper.

316 Stainless Steel

Body: 45.4mm (1³/₄" x 80mm (3") stainless steel rod.

Pole: 38mm (1¹/₂" x 500mm (19³/₄" stainless steel tube.

Base: 2mm (1/16") hand spun stainless steel.

Mounting

The luminaire is mounted to the wall using two 316 stainless steel screws through the shallow base 16mm (5/8") in depth. A Wall Box Adaptor Plate (Cat. WBAP) is available as an accessory to fit 3.0 and 4.0 junction boxes for USA/Canada.

Features

Lens

6mm (1/4") clear flush fit shatter resistant glass with Hex Cell Louvre for glare control.

Lifetime Warranty.

Gaskets

Silicone, iron impregnated 220°C (428°F).

Lamp Holder

MR11 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) Teflon cables.

Accessories

Cable Joint Kit (Cat. CJK 150). Not approved for USA/Canada.

Frosted Lens (Cat. LENSEURF).

Swivel

Copper luminaires - 360° rotation and 0-90° elevation, solid brass with anti rust spring.

Stainless steel luminaires - 360° rotation and 0-90° elevation, full stainless steel construction.

Standards

IP66, UL1838, 

Luminaire Weight

Copper - 2.000kg (4lb 6oz)

Stainless Steel - 1.500kg (lb 3oz)

Power Supply

Hunza Inground or Wall Mount Transformer: not included.

USA and Canada:



Hunza Wall Mount Transformer: not included.

Lamp Options

MR11 - 20 watt lamp max.

USA and Canada

MR11 - 10 watt lamp max.

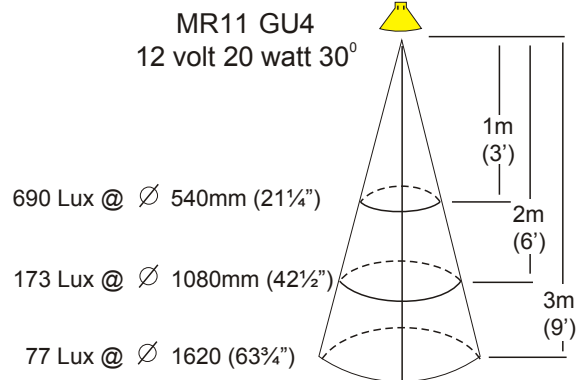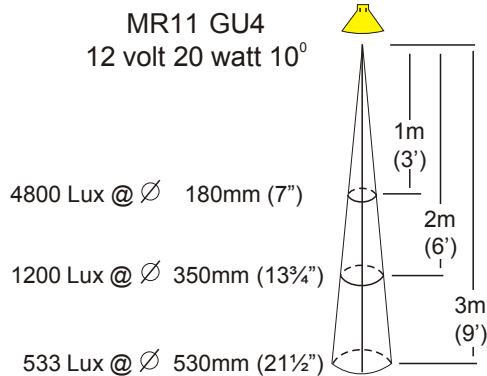

HUNZA™ PURE
OUTDOOR
LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Glen Innes
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunzalighting.com

INTERNATIONAL CONTACTS:
[http://www.hunzalighting.com/
contact.php](http://www.hunzalighting.com/contact.php)
Specification may change without notice.
Manufactured in New Zealand.
© 2016 Hunza Holdings Ltd.